

M-POWER-3T

AC POWER & DATA CONNECTIVITY SOLUTION

3T-ABA-BATP

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Flmsford, NY 10523 mormax.com

sales@mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to


Trim Plate Finish:

capability for our clients.

BLACK (ABS)

Custom Finishes Available

M-POWER-3T-ABA-BATP

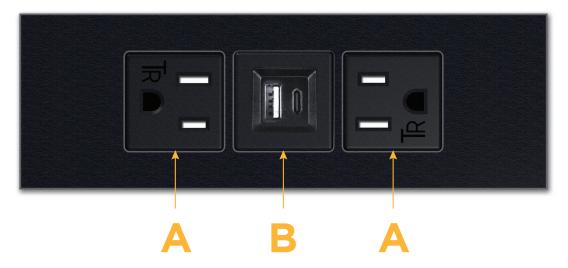

mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- B USB-A & USB-C (3.2A USB-A / 15W USB-C)
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug Optional Standard Straight 120 VAC Plug Optional Straight 120 VAC Pass-through Plug Shown in Black (ABS) Trim Plate, featuring 2 Tamper Resistant ACs and 1 USB-A $\&\,1$ USB-C Charging Port.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB-A CHARGING FOR ALL DEVICES
- •15W HIGH SPEED USB-C CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A



Distributed by



Mormax Company, Inc.

TOP

914-699-0101 sales@mormax.com mormax.com

8 Westchester Plaza Elmsford, NY 10523

Modules/Ports:

- Tamper Resistant AC Receptacle
- USB-A & USB-C (3.2A USB-A / 15W USB-C)

2.000" (50.800mm) 2.106" (53.503mm) Shown with 2 Tamper Resistant ACs 6.000" (152.403mm) 6.319" (160.503mm) and 1 USB-A &USB-C Charging Port. Optional Straight 120 VAC Pass-through Plug 0.619" (15.746mm) 1.141" 0.984" (25.00mm (29.00mm) 0.613" (15.594m 1.704" (43,300mm) Ø 1.132' (28.766mm) 2.515" (63.900mm)

