

M-POWER-3T

AC POWER & DATA CONNECTIVITY SOLUTION

3T-AUC-BRAATP

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Flmsford, NY 10523 sales@mormax.com

mormax.com


Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish:

ANTIQUED BRASS (ABS)

Custom Finishes Available

M-POWER-3T-AUC-BRAATP

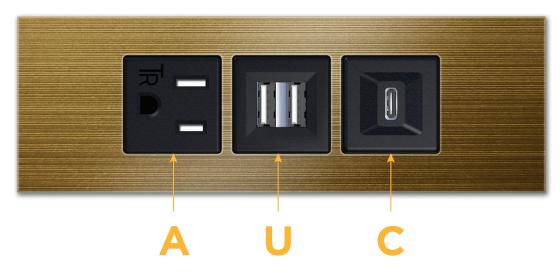

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plua

Supplied with Low Profile Flat 45° Angle 120 VAC Plug

Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

Shown in Antiqued Brass (ABS) Plate, featuring 1 Tamper Resistant AC, 1 Double USB Charging Port, and 1 USB-C Charging Port.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 27W HIGH SPEED USB-C CHARGING FOR ALL DEVICES
- 3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A



Distributed by



Mormax Company, Inc.

914-699-0101 sales@mormax.com mormax.com

8 Westchester Plaza Elmsford, NY 10523

Modules/Ports:

END

1.555" (39.503mm)

- Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports - Rated for 3.2A)
- USB-C (27W High Speed Charging Port)

TOP 2.000" (50.800mm) 2.106" (53.503mm) 6.000" (152.403mm) 6.319" (160.503mm) Shown with 1 Tamper Resistant AC, 1 Double USB Charging Port, and 1 USB-C Charging Port. Optional Straight 120 VAC 1.233" (31.340mr Pass-through Plug 0.619" (15.746mm) 1 141" 0.984 HH (15.594mm) 1704" Ø 1.132" (28.766mm) 2.515" (63.900mm) 2.000" (50.800mm) 0.234" (5.944mm) 0.140" (3.563mm) 0.118" (3.000mm) 2.076" (52.744mm) 1.842" (46.800mm) SIDE

0.905" (23.000mm)