M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AUCX-BAB

METRO LIGHT & POWER

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Bezel Finish:
Custom Finishes Available

BLACK (ABS)
M-POWER-4T-AUCX-BAB

Features:

A B J H

Module/Port Options:	
A	Tamper Resistant AC Receptacle
B	Double USB (Fast Charging Ports - Rated for 3.2A)
C	HDMI
D	CAT 6
E	3.5mm Mini Stereo Jack
F	Single USB (Fast Charging Port - Rated for 3.2A)
G	RJ 12
H	Switched AC
I	3-Way Switch
J	USB C (High Speed Charging Port)
K	Switched AC (Rocker Switch)

Plug:
Low Profile Flat 45° Angle 120 VAC Plug
Standard Straight 120 VAC Plug

- **CLEAN, COMPACT DESIGN**
- **STREAMLINED**
- **LOW PROFILE**
- **SIDE-EXITING CORDS**
- **PLUG & PLAY**
- **3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES**
- **6' AC CORD & PLUG (FLAT PLUG STANDARD)**
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **UL LISTED FOR MOUNTING IN FURNITURE**
- **15A**

Shown in Black (ABS) Bezel, featuring 1 Tamper Resistant AC, 1 Double USB Charging Port, 1 USB C Charging Port and 1 Switched AC.

c(UL)us
LISTED
E491161

M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AUCX-BAB

METRO LIGHT & POWER

Specs:

Modules/Ports:

A	Tamper Resistant AC Receptacle
B	Double USB (Fast Charging Ports - Rated for 3.2A)
C	USB C (High Speed Charging Port)
D	Switched AC

A B C D
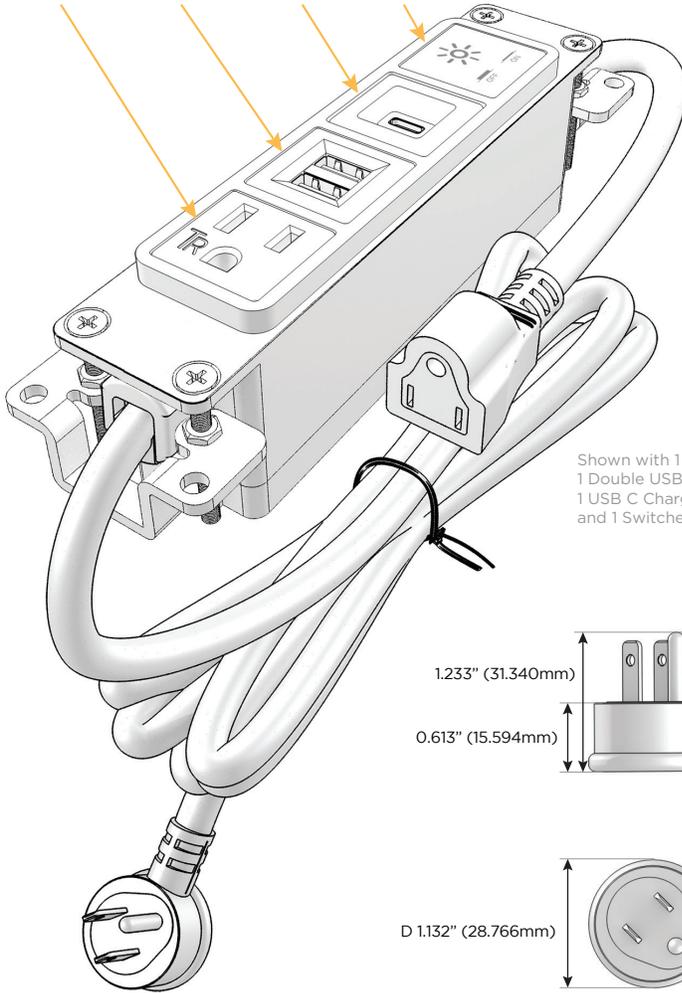
Shown with 1 Tamper Resistant AC,
1 Double USB Charging Port,
1 USB C Charging Port,
and 1 Switched AC.

TOP

1.381" (35.082mm)
2.106" (53.503mm)

5.101" (129.582mm)
6.811" (173.000mm)
7.559" (192.003mm)

1.233" (31.340mm)
0.619" (15.746mm)
0.613" (15.594mm)

D 1.132" (28.766mm)

END

1.381" (35.082mm)
1.842" (46.800mm)
2.076" (52.744mm)
1.555" (39.503mm)

SIDE

0.234" (5.944mm)
0.118" (3.000mm)
0.905" (23.000mm)

c(UL)us
LISTED
E491161