

M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AUAC-BATP

MORMAX		
Mormax Company, Inc.	C	914-699-0101
8 Westchester Plaza	\square	sales@mormax.com
Elmsford, NY 10523	\mathcal{S}	mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Slim Plate Finish:

Custom Finishes Available

BLACK (ABS) M-POWER-4T-AUAC-BATP



Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- B Double USB (Fast Charging Ports Rated for 3.2A)
- C HDMI
- D CAT 6
- E 3.5mm Mini Stereo Jack
- F Single USB (Fast Charging Port Rated for 3.2A)
- G RJ 12
- H Switched AC
- Wireless AC
- J 3-Way Switch
- K USB C (High Speed Charging Port)

Plug:

Low Profile Flat 45° Angle 120 VAC Plug Standard Straight 120 VAC Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A



Shown in Black (ABS) Slim Plate, featuring 2 Tamper Resistant ACs,

1 Double USB Charging Port, and 1 USB C Charging Port.



M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AUAC-BATP

 Mormax Company, Inc.
 § 914-699-0101

 8 Westchester Plaza
 Sales@mormax.com

 Elmsford, NY 10523
 Ø mormax.com

TOP


2.000" (50.800mm)


2.106" (53.503mm)





Modules/Ports: A Tamper Resistant AC Receptacle

- B Double USB (Fast Charging Ports Rated for 3.2A)
- C USB C (High Speed Charging Port)

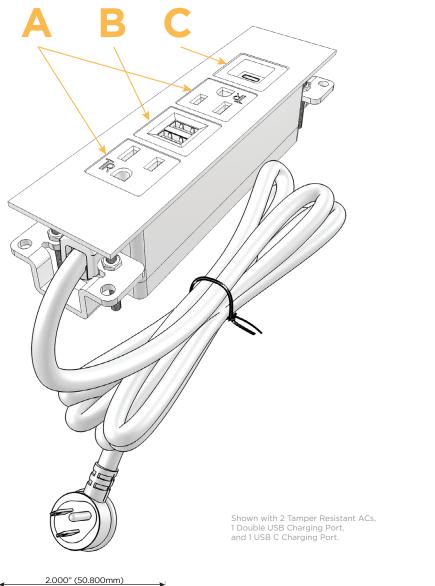

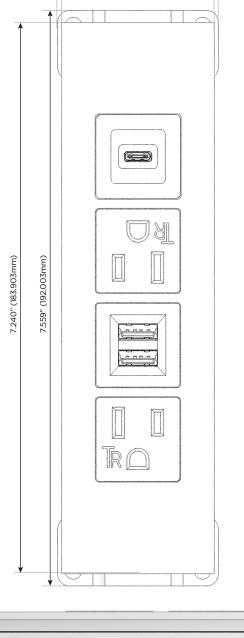





0.093" (2.381mm) _ 0.140" (3.563mm)

0.905" (23.000mm)

SIDE



0.234" (5.944mm)