M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AUCA-B2ATP

MORMAX

Mormax Company, Inc.
8 Westchester Plaza
Elmsford, NY 10523

914-699-0101
sales@mormax.com
mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish: **SATIN BLACK (PC)**
Custom Finishes Available
M-POWER-4T-AUCA-B2ATP

Features:

Module/Port Options:

A	Tamper Resistant AC Receptacle
B	Double USB (Fast Charging Ports - Rated for 3.2A)
C	HDMI
D	CAT 6
E	3.5mm Mini Stereo Jack
F	Single USB (Fast Charging Port - Rated for 3.2A)
G	RJ 12
H	Switched AC
I	3-Way Switch
J	USB-C (27W High Speed Charging Port)
K	USB-C (13W High Speed Charging Port)
L	Switched AC (Rocker Switch)

Plug:

	Low Profile Flat 45° Angle 120 VAC Plug
	Standard Straight 120 VAC Plug

• **CLEAN, COMPACT DESIGN**
• **STREAMLINED**
• **LOW PROFILE**
• **SIDE-EXITING CORDS**
• **PLUG & PLAY**
• **3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES**
• **6' AC CORD & PLUG (FLAT PLUG STANDARD)**
• **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
• **UL LISTED FOR MOUNTING IN FURNITURE**
• **15A**

Shown in Satin Black (PC) Trim Plate, featuring 2 Tamper Resistant ACs, 1 Double USB Charging Port, and 1 USB-C Charging Port.

c(UL)us
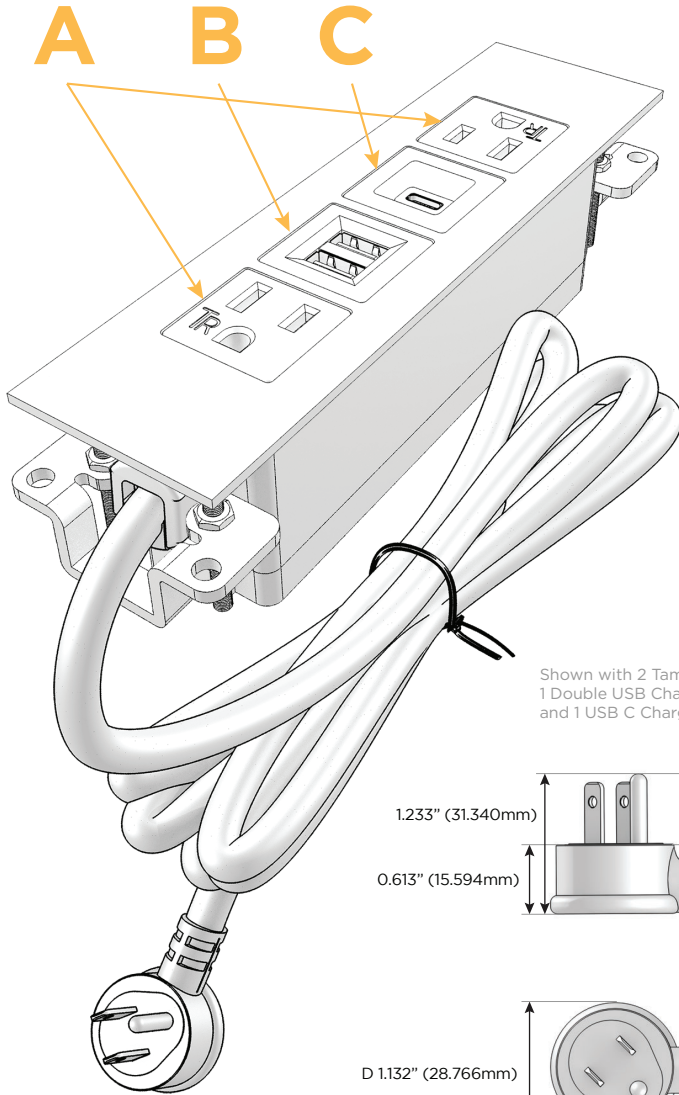LISTED
E491161

M-POWER-4T

AC POWER & DATA CONNECTIVITY SOLUTION

M-POWER-4T-AUCA-B2ATP

MORMAX

Specs:

Modules/Ports:

A	Tamper Resistant AC Receptacle
B	Double USB (Fast Charging Ports - Rated for 3.2A)
C	USB-C (27W High Speed Charging Port)

A B C

Shown with 2 Tamper Resistant ACs,
1 Double USB Charging Port,
and 1 USB C Charging Port.

TOP

2.000" (50.800mm)
2.106" (53.503mm)

7.240" (183.903mm)
7.559" (192.003mm)

1.233" (31.340mm)
0.619" (15.746mm)
0.613" (15.594mm)

D 1.132" (28.766mm)

END

2.000" (50.800mm)
1.842" (46.800mm)
2.076" (52.744mm)
1.555" (39.503mm)

SIDE

0.234" (5.944mm)
0.093" (2.381mm)
0.140" (3.563mm)
0.118" (3.000mm)

0.905" (23.000mm)

c (UL) us
LISTED
E491161