

# M-POWER-4T

# MORMAX

Mormax Company, Inc. 8 Westchester Plaza

Flmsford, NY 10523

914-699-0101

mormax com

sales@mormax.com

## **AC POWER & DATA CONNECTIVITY SOLUTION**

## M-POWER-4T-AUCR-BATP

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Trim Plate Finish:

**BLACK (ABS)** 

Custom Finishes Available

M-POWER-4T-AUCR-BATP



### Features:

#### **Module/Port Options:**

- A Tamper Resistant AC Receptacle
- B Double USB (Fast Charging Ports Rated for 3.2A)
- C HDMI
- D CAT 6
- E 3.5mm Mini Stereo Jack
- F Single USB (Fast Charging Port Rated for 3.2A)
- G RJ 12
- H Switched AC
  - 3-Way Switch
- J USB C (High Speed Charging Port)
- K Switched AC (Rocker Switch)

#### Plug:

Low Profile Flat 45° Angle 120 VAC Plug Standard Straight 120 VAC Plug

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A







# M-POWER-4T

M-POWER-4T-AUCR-BATP

# MORMAX

TOP

2.000" (50.800mm)

914-699-0101

8 Westchester Plaza



Elmsford, NY 10523

### Mormax Company, Inc.


## Specs:


## Modules/Ports:


- Tamper Resistant AC Receptacle
- Double USB (Fast Charging Ports Rated for 3.2A)

**AC POWER & DATA CONNECTIVITY SOLUTION** 

- USB C (High Speed Charging Port)
- Switched AC (Rocker Switch)

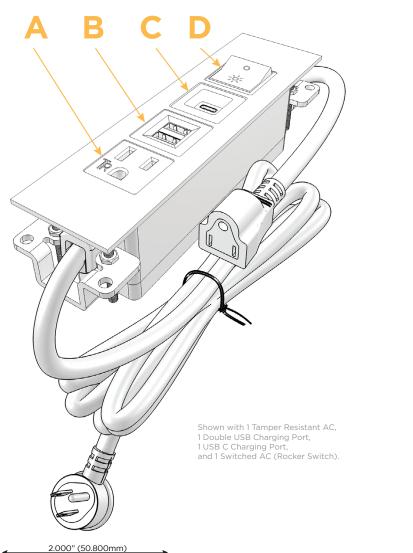

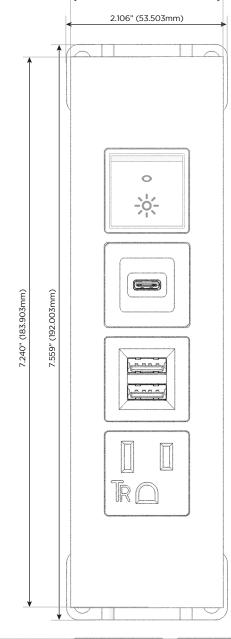

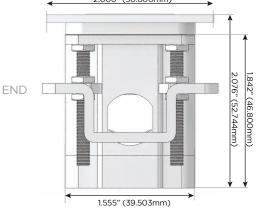

0.093" (2.381mm) 0.140" (3.563mm) 0.118" (3.000mm) SIDE 0.905" (23.000mm)

0.234" (5.944mm)