

M-POWER-5T

AC POWER & DATA CONNECTIVITY SOLUTION

5T-AUCD-APSTE

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Elmsford, NY 10523 914-699-0101

sales@mormax.com


Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Plate Finish:

SPECIAL ANTIQUED BRONZE (STEEL)

Custom Finishes Available

M-POWER-5T-AUCD-APSTP

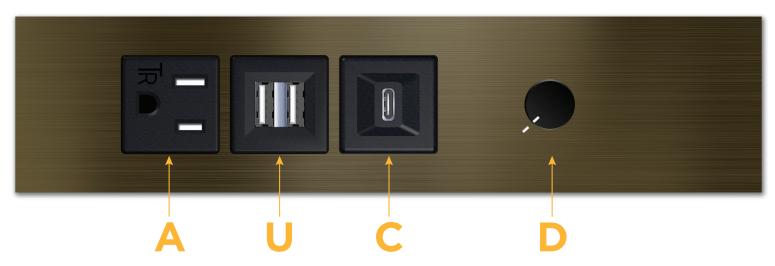

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- U Double USB (Fast Charging Ports Rated for 3.2A)
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug:

Low Profile Flat 45° Angle 120 VAC Plug

Standard Straight 120 VAC Plug

Shown in Special Antiqued Bronze (Steel) Slim Plate, featuring 1 Tamper Resistant AC, 1 Double USB Charging Port, 1 USB-C Charging Port, and 1 AC Dimmer.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- 3.2A HIGH SPEED USB-A CHARGING FOR ALL DEVICES
- 27W USB-C FAST-CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- ETL LISTED (IN COMPLIANCE WITH UL 962A)
- 15A
- 0% TO 100% DIMMING



Distributed by



Mormax Company, Inc.

914-699-0101 sales@mormax.com

mormax.com

8 Westchester Plaza Elmsford, NY 10523

5T-AUCD-APSTP TOP Specs: Modules/Ports: 2.000" (50.800mm) Tamper Resistant AC Receptacle 2.106" (53.503mm) Double USB (Fast Charging Ports - Rated for 3.2A) C USB C (High Speed Charging Port) AC Dimmer 8.480" (215.403mm) 8.799" (223.503mm) Shown with 1 Tamper Resistant AC, 1 Double USB Charging Port, 1 USB-C Charging Port, and 1 AC Dimmer. Optional Straight 120 VAC Pass-through Plug 1233" 0.619" (15.746mm) 1.141" 0.984 1704" Ø 1.132° (28.766m 2.515" (63.900mm) 2.000" (50.800mm) 0.093" (2.381mm) 📫 0.234" (5.944mm) 0.140" (3.563mm) 0.118" (3.000mm) ‡ 2.076" (52.744mm) 1.842" (46.800mm) END SIDE

1.555" (39.503mm)

0.905" (23.000mm)