M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION

TWIN OUTLETS WITH 3-WAY SWITCHING
FOR LOW VOLTAGE LED LIGHTING AND SWITCHED AC
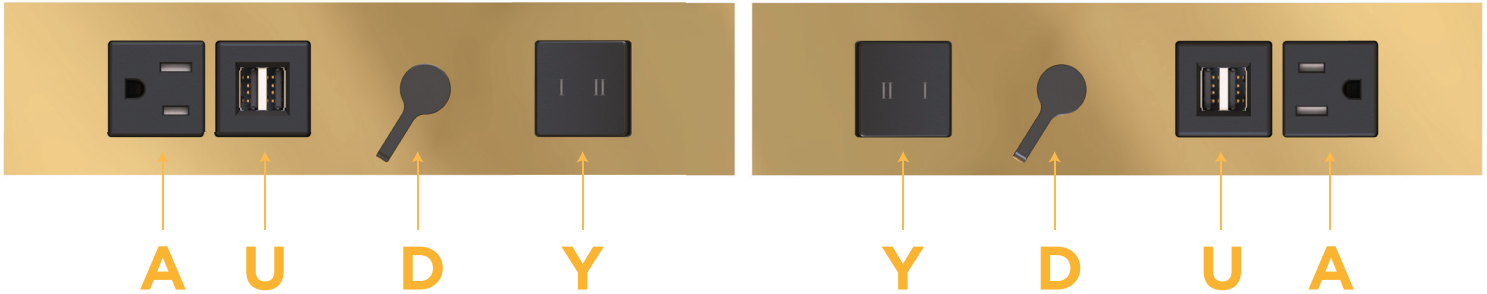M-POWER-5T-AUDY-BZSTP(2)-ADA

METRO LIGHT & POWER

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Plate Finish:
Custom Finishes Available

BRONZE (STEEL)
M-POWER-5T-AUDY-BZSTP(2)-ADA

A U D Y   Y D U A

Features:

Module/Port Options:

A	Tamper Resistant AC Receptacle
B	USB-A & USB-C (3.0A USB-A / 15W USB-C)
U	Double USB-A (Fast Charging Ports - Rated for 3.2A)
D	AC Dimmer
H	HDMI
6	CAT 6
12	RJ 12
X	Switched AC
Y	3-Way Switch
C	USB-C (27W High Speed Charging Port)
Z	USB-C (18W High Speed Charging Port)
R	Switched AC (Rocker Switch)

Plug:

Supplied with Low Profile Flat 45° Angle 120 VAC Plug
Optional Standard Straight 120 VAC Plug
Optional Straight 120 VAC Pass-through Plug

Shown in Bronze (Steel) Plate, featuring 1 Tamper Resistant AC, 1 Double USB-A Charging Port, 1 AC Dimmer Switch with ADA compliant knob, and one 3-Way Switch.

- **CLEAN, COMPACT DESIGN**
- **STREAMLINED**
- **LOW PROFILE**
- **SIDE-EXITING CORDS**
- **PLUG & PLAY**
- **3.2A DOUBLE USB-A CHARGING FOR FOR ALL DEVICES**
- **TWIN OUTLETS WITH 3-WAY SWITCHING FOR LOW VOLTAGE LED LIGHTING**
- **6' AC CORD & PLUG (FLAT PLUG STANDARD)**
- **CUSTOMIZABLE CONFIGURATIONS AND FINISHES**
- **ETL LISTED IN COMPLIANCE WITH UL962A**
- **0% TO 100% DIMMING**
- **ADA COMPLIANT KNOB**
- **15A**
- **DESIGNED FOR USE ONLY WITH METRO L&P'S UL LISTED LEDS, AND CLASS 2 UL LISTED LED DRIVERS**

⚠ **ETL LISTED AND APPROVED FOR USE ONLY WITH METRO LIGHT & POWER'S UL LISTED LEDS & CLASS 2 UL LISTED LED DRIVERS**

ETL LISTED
c us
Intertek
5005200

M-POWER-5T
AC POWER & DATA CONNECTIVITY SOLUTION

TWIN OUTLETS WITH 3-WAY SWITCHING
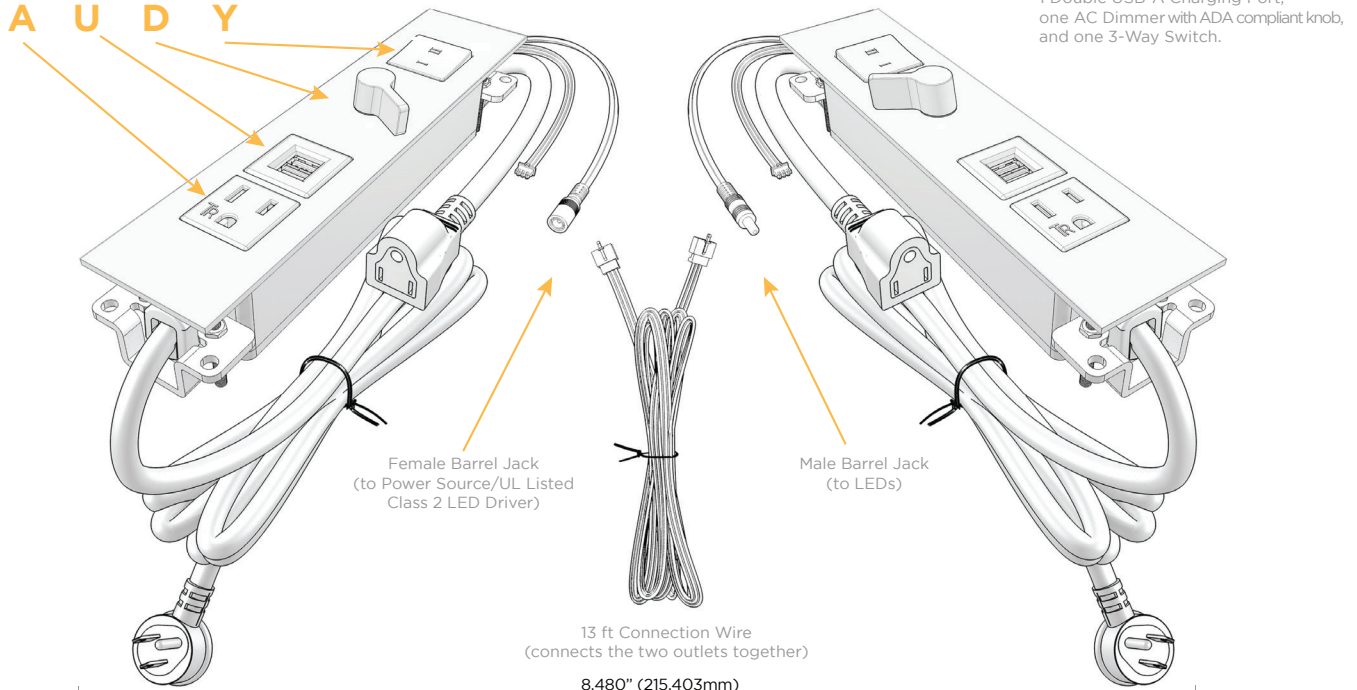FOR LOW VOLTAGE LED LIGHTING AND SWITCHED AC

M-POWER-5T-AUDY-BZSTP(2)-ADA

Modules/Ports:

A Tamper Resistant AC Receptacle

U Double USB-A (Fast Charging Ports - Rated for 3.2A)

D AC Dimmer (ADA Compliant Knob)

Y 3-Way Switch

Shown with 1 Tamper Resistant AC,
1 Double USB-A Charging Port,
one AC Dimmer with ADA compliant knob,
and one 3-Way Switch.

A U D Y

Female Barrel Jack
(to Power Source/UL Listed
Class 2 LED Driver)

Male Barrel Jack
(to LEDs)

13 ft Connection Wire
(connects the two outlets together)

8.480" (215.403mm)

8.799" (223.503mm)

2.106" (53.503mm)

2.000" (50.800mm)

TOP

2.639" (67.040mm)

0.093" (2.381mm)
0.140" (3.563mm)
0.118" (3.000mm)

1.842" (46.800mm)

2.076" (52.744mm)

2.000" (50.800mm)

1.555" (39.503mm)

0.905" (23.000mm)

c(ETL)us
LISTED

Intertek
5005200