

M-POWER-5T

AC POWER & DATA CONNECTIVITY SOLUTION

5TW-AUCAY-WATP(2)

Distributed by



Mormax Company, Inc.

8 Westchester Plaza Flmsford, NY 10523 **914-699-0101**


sales@mormax.com


mormax.com

Metro Light & Power's line of power & data solutions offers sophisticated design elements combined with greater ease of installation. Streamlined and low-profile, enhanced by side-exiting cords, our outlets advance the industry with their cutting-edge look and feel. We believe flexibility is key, and we provide a variety of mounting options, including the ability to mount in limited spaces. Our outlets are available in many finishes and configurations, in addition to a custom color and finish capability for our clients.

Plate Finish: Custom Finishes Available WHITE (ABS)

M-POWER-5TW-AUCAY-WATP(2)

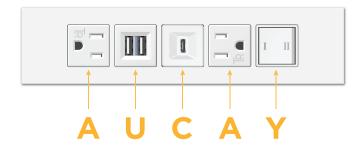

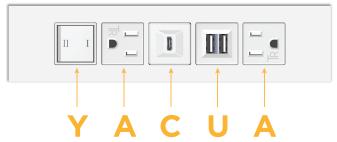

Features:

Module/Port Options:

- A Tamper Resistant AC Receptacle
- B USB-A & USB-C (3.0A USB-A / 15W USB-C)
- U Double USB-A (Fast Charging Ports Rated for 3.2A)
- D AC Dimmer
- H HDMI
- 6 CAT 6
- 12 RJ 12
- X Switched AC
- Y 3-Way Switch
- C USB-C (27W High Speed Charging Port)
- Z USB-C (18W High Speed Charging Port)
- R Switched AC (Rocker Switch)

Plug

Supplied with Low Profile Flat 45° Angle 120 VAC Plug Optional Standard Straight 120 VAC Plug

Optional Straight 120 VAC Pass-through Plug

Shown in White (ABS), Plate, with 2 Tamper Resistant ACs, 1 Double USB Charging Port, 1 USB-C Charging Port, and one 3 Way Switch.

- CLEAN, COMPACT DESIGN
- STREAMLINED
- LOW PROFILE
- SIDE-EXITING CORDS
- PLUG & PLAY
- TWIN OUTLETS WITH 3-WAY SWITCHING FOR LOW VOLTAGE LED LIGHTING
- 3.2A HIGH SPEED USB-A CHARGING FOR ALL DEVICES
- 27W HIGH SPEED USB-C CHARGING FOR ALL DEVICES
- 6' AC CORD & PLUG (FLAT PLUG STANDARD)
- CUSTOMIZABLE CONFIGURATIONS AND FINISHES
- UL LISTED FOR MOUNTING IN FURNITURE
- 15A
- DESIGNED FOR USE WITH METRO L&P'S UL LISTED LEDS,






Mormax Company, Inc. 8 Westchester Plaza

914-699-0101 sales@mormax.com mormax.com

Elmsford, NY 10523

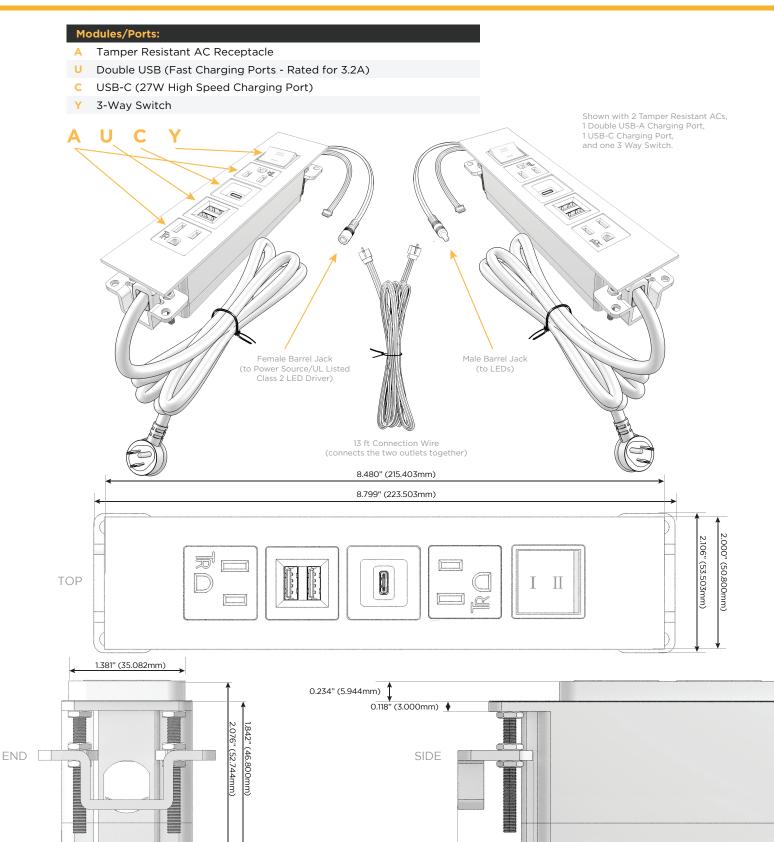

0.905" (23.000mm)

1.555" (39.503mm)